

## CURRENT PROBE & POWER SUPPLY



GCP-530/1030



GCP-206P/425P



### 50MHz and 100MHz AC/DC Current Measurement

For easily observing current waveforms under a wide bandwidth and with high sensitivity, the GCP-530 and GCP-1030 clamp on current probes only need to be connected to the BNC input of a data logger or oscilloscope and clamped onto a conductor to start measurement.

### Multiple Applications for AC and DC Measurements

Using the combination of a Hall-effect sensor and an AC current transformer, the probes provide accurate measurement of DC or AC currents up to 30Arms or DC100 MHz (for model GCP-1030). The split core construction allows the probe to easily clip on to a conductor without breaking the conductor.

### Wide Range of Applications

With a flat frequency response, low noise and low insertion loss, the GCP-530 and GCP-1030 clamp-on probes are ideal for measuring steady state or transient current in amplifiers, inverters, electric motors, switching power supplies, controllers, sensors, LCD displays and electronic ballasts. For low current measurements, the high signal-to-noise ratio also makes the GCP-530 and GCP-1030 current probes ideal solutions.

### High Accuracy Current Measurement

The demagnetize switch demagnetizes the core to remove any residual magnetism that has developed from excessive input current or from external magnetic fields. The zero adjustment control allows temperature drift and DC voltage offset to be easily compensated.

## GCP-530/1030 GCP-206P/425P

### FEATURES

- Bandwidths : DC~50 MHz and 100 MHz
- High S/N Ratio : Ideal for Measuring mA Signals (GCP-530)
- High Bandwidth, From DC ~ 100 MHz (GCP-1030)
- DC and AC Measurements
- Better than 1% Accuracy
- Direct Connection to High-impedance 1 MΩ BNC Oscilloscope Inputs
- Demagnetize Switch : Demagnetizes the Core to Remove any Residual Magnetism
- Simple Overload Protector Prevents Damage Due to Overheating
- 2 Channel or 4 Channel Current Probe Power Supplies Designed for the GCP-530 and GCP-1030 Clamp Probes, The Power Supplies are Ideal for When Power is not Available From an Oscilloscope or for General Current Measurement Applications

### APPLICATIONS

- Power Supply Design
- Power Device Evaluation
- Power Converter Design

**GCP-530/1030 & GCP-206P/425P**



## SPECIFICATIONS

	<b>GCP-530</b>	<b>GCP-1030</b>
<b>Probe Bandwidth</b>	DC ~ 50MHz	DC ~ 100MHz
<b>Rise Time</b>	7ns or less	3.5ns or less
<b>Maximum Continuous Input Range</b>	30Arms	30Arms
<b>Maximum Peak Current Value</b>	50Arms	50Arms
<b>Output Voltage Rate</b>	0.1V/A	0.1V/A
<b>Amplitude Accuracy</b>	±1.0%rdg±1mV (0~30Arms/DC, 45~66Hz) ; ±2.0%rdg (30Arms~50A peak/DC, 45~66Hz)	±1.0%rdg±1mV (0~30Arms/DC, 45~66Hz) ; ±2.0%rdg (30Arms~50A peak/DC, 45~66Hz)
<b>Noise</b>	2.5mA rms or less	2.5mA rms or less
<b>Rate Supply Voltage</b>	±12V± 0.5V	±12V± 0.5V
<b>Maximum Rated Power</b>	5.6VA	5.3VA
<b>Maximum Rated Voltage</b>	300V ,CAT I	300V ,CAT I

## SPECIFICATIONS

	<b>GCP -206P</b>	<b>GCP-425P</b>
<b>Compatible Current Probe</b>	GCP-530/GCP-1030	GCP-530/GCP-1030
<b>Number of Power Supply Connectors</b>	2	4
<b>Output Voltage</b>	±12V± 0.5V	±12V± 0.5V
<b>Rated Output Current</b>	±600mA	±2.5A
<b>Rated Supply Voltage (50/60Hz)</b>	100V AC±10% 120/220/240 V (Specify when ordering)	100V~240V AC±10%
<b>Maximum Rated Power</b>	20VA	170VA
<b>Dimensions</b>	73(W)x110(H)x 186(D)mm ; Approx.1.1kg	80(W)x119(H)x 200(D) mm ; Approx.1.1kg
<b>Weight</b>		
<b>Accessories</b>	Power cord, fuse	Power cord, fuse

## ORDERING INFORMATION

**GCP-530** 50 MHz/30A AC/DC Current Probe


**GCP-1030** 100 MHz/30A AC/DC Current Probe

**GCP-206P** 2-Channel Power Supply for GCP-530 and GCP-1030 Series Current Probes


**GCP-425P** 4-Channel Power Supply for GCP-530 and GCP-1030 Series Current Probes

## IMPORTANT CHARACTERISTICS


### GCP-530

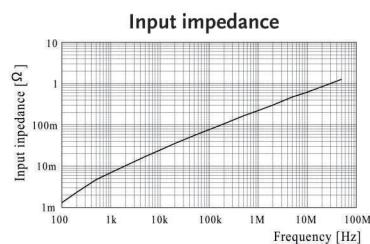


### Frequency response

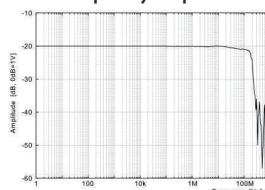


### Continuous maximum input rating

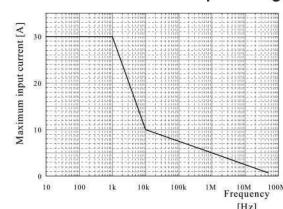


### GCP-1030

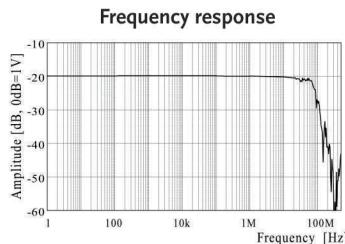

### Continuous maximum input rating

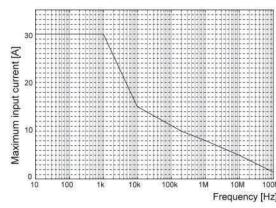

### Input impedance

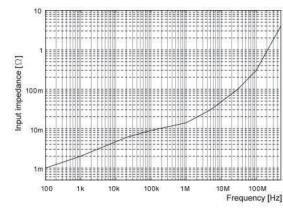

Global Headquarters

**GOOD WILL INSTRUMENT CO., LTD.**

No.7-1, Jhongsing Road, Tucheng Dist., New Taipei City 236, Taiwan  
T +886-2-2268-0389 F +886-2-2268-0639  
E-mail: marketing@goodwill.com.tw

China Subsidiary

**GOOD WILL INSTRUMENT (SUZHOU) CO., LTD.**

NO. 69, Lushan Road, Snd, Suzhou Jiangsu 215011 China  
T +86-512-6661-7177 F +86-512-6661-7277  
E-mail: marketing@instek.com.cn

Malaysia Subsidiary

**GOOD WILL INSTRUMENT (M) SDN. BHD.**

27, Persiaran Mahsuri 1/1, Sunway Tunas,  
11900 Bayan Lepas, Penang, Malaysia  
T +604-6309888 F +604-6309889  
E-mail: sales@goodwill.com.my

U.S.A. Subsidiary

**INSTEK AMERICA CORP.**

3661 Walnut Avenue Chino, CA 91710, U.S.A.  
T +1-909-5918358 F +1-909-5912280  
E-mail: sales@instekamerica.com

Japan Subsidiary

**INSTEK JAPAN CORPORATION**

4F, Prosper Bldg, 1-3-3 Iwamoto-Cho Chiyoda-Ku,  
Tokyo 101-0032 Japan  
T +81-3-5823-5656 F +81-3-5823-5655  
E-mail: info@instek.co.jp

Korea Subsidiary

**GOOD WILL INSTRUMENT KOREA CO., LTD.**

Room No.805, Ace Hightech-City B/D 1Dong,  
Mullae-Dong 3Ga 55-20, Yeongdeungpo-Gu, Seoul, Korea  
T +82-2-3439-2205 F +82-2-3439-2207  
E-mail : gwinstek@gwinstek.com.kr

**GW INSTEK**

Simply Reliable

[www.gwinstek.com](http://www.gwinstek.com)